



SIZE:
L:190mm
W:20mm
H:20mm



20W WATERPROOF LED POWER SUPPLY SINGLE OUTPUT

■Features

- AC input: 100-240V
- Protection: short-circuit, overload, over voltage, over temperature
- 100% full-load aging test
- 300VAC surge for 5 seconds withstandable
- Working temperature up to 60°C
- 5G vibration tested
- High efficiency, long life span, and high reliability, low cost
- IP67 grade
- 2 years warranty



■Application

*Industrial automation machinery

*Industrial control system


*LED lighting

*Electronic instruments, equipments or apparatus


Specifications

	Product No.	WPS-20-12	WPS-20-24
Output	DC voltage	12V	24V
	Rated Current	1.7A	0.83A
	Current Range	0-1.7A	0-0.83A
	Rated Power	20W	20W
	Ripple and Noise (Max) Note.2	200mVp-p	240mVp-p
	Voltage adjustment	12±0.5V	24±0.5V
	Voltage Accuracy Note3	±3%	±3%
	Linear Adjustment Note4	±0.5%	±0.5%
	Load Adjustment Note5	±2%	1.50%
	Start and rise time	1000ms, 30ms/230VAC	1000ms, 30ms/110V
Input	Hold time (Typ)	50ms/230VAC 10ms/115AC	
	Voltage range	100-240VAC	
	Frequency range	47-63HZ	
	Efficiency (Typ)	79%	83%
	AC current (Typ)	0.22A/90V 0.18A/220V	
	Surge current (Typ)	Cold Start: 65A/230VAC	
Protection	Overload	Larger than 105% of capacity restoration after abnormality removed	
	Overheat	Overheat protection starts when temperature in transistor over 140°C Automatic restoration when temperature is back normal	
	Working temp.	-20~+60°C (Refer to the transition curve)	
	Working humidity	20~90% RH, without condense	
Environment	Storage temp & humidity	-40~+80°C	
	Temp. coefficient	±0.03%/°C (0~50°C)	
	Vibration proof	10~500HZ, 5G 10min / cycle, X, Y, Z axes 60 min each	
	Safety regulation	GB195110.1-2004/IEC61347-1:2003 CE	
	Voltage proof	I/P-O:1.5KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC	
Safety reg. & EMC (Note.6)	Insulation resistance	I/P-O/P, I/P-FG, O/P-FG: 100M Ohms/500VDC/25°C/70% RH	
	EMC irradiation	EN 55032:2015+A11:2020; EN IEC61000-3-2:2019	
	EMC disturbance proof	EN61000-3-3:2013+A1:2019	
	Dimensions	188*20*20(L*W*H)	
	Packing	0.22Kg	
Notes:	1. Unless specially indicated, all data are taken under 230VAC input, rated load and 25°C environment temp.		
	2. Ripple and noise: measured with a 12" double ripple cord connected in parallel with a 0.1μF and a 47 μF capacitor		
	3. Accuracy: including preset errors, linear adjustment rate and load adjustment rate.		
	4. Linear adjustment: taken under rated load from low voltage to high voltage.		
	5. Load adjustment: taken under 0~100% of rated load.		
	6. Power supply is taken as part of the whole system, and needs to be confirmed with terminal instruments for EMC.		


■Appearance

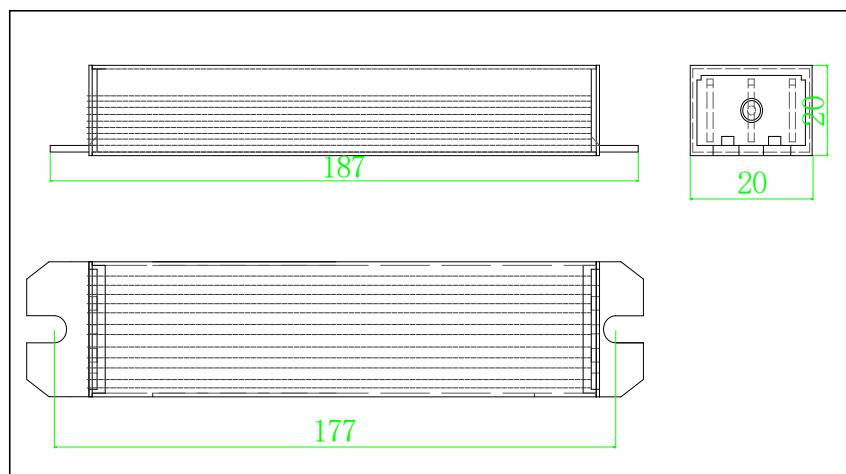

■Frame diagram

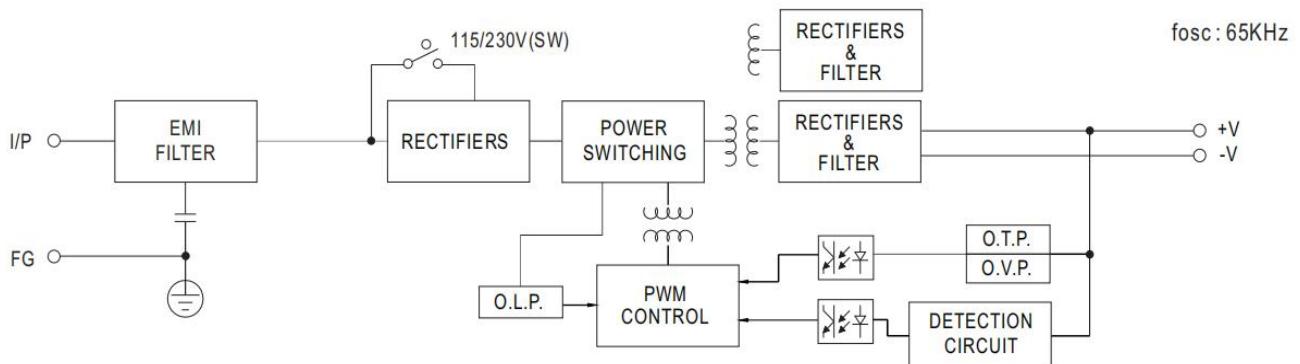

■Tenuation curve

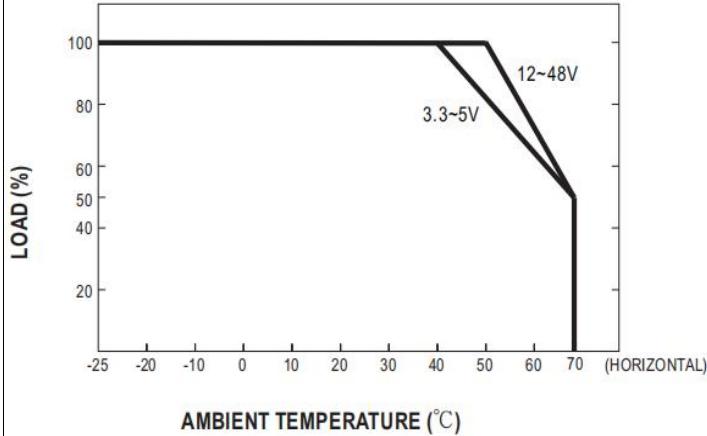

■Static property curve

