

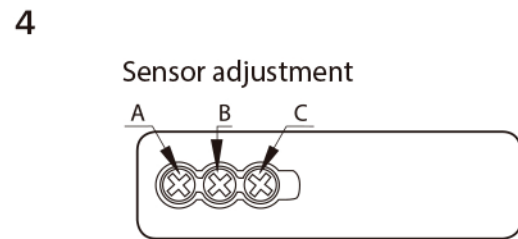
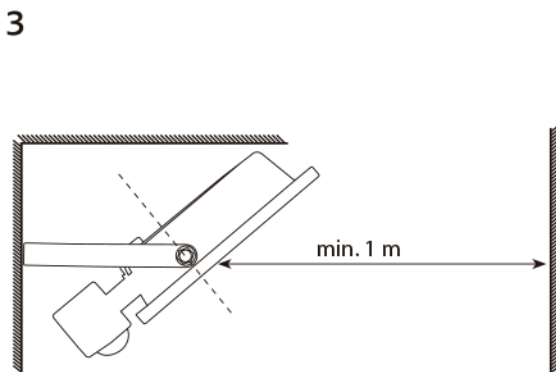


LED FLOODLIGHT

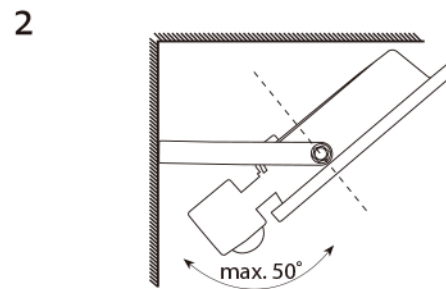

Time-delay: min. 10 s \pm 5 s – max. 10 min \pm 1 min
 Detection angle: 120°
 Ambient light: 5 lux \rightarrow 2 000 lux (adjustable)
 Detection distance: 5–10 m
 Detection motion speed: 0.6–1.5 m/s

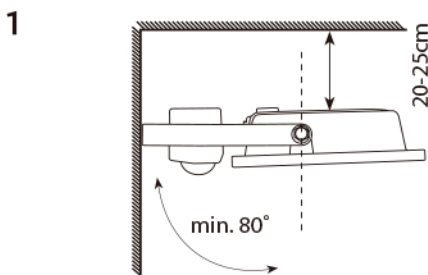

Specification

Item	Wattage	Lumen	Volt	Dimension(mm)
FL-BL2S10A1	10W	800lm	AC220-240V	125x50x116mm
FL-BL2S20A1	20W	1600lm	AC220-240V	150x50x138mm
FL-BL2S30A1	30W	2400lm	AC220-240V	185x50x178mm
FL-BL2S50A1	50W	4000lm	AC220-240V	211x50x205mm
FL-BL2S10A1-B6	10W	800lm	AC220-240V	125x60x160mm
FL-BL2S20A1-B6	20W	1600lm	AC220-240V	150x60x175mm
FL-BL2S30A1-B6	30W	2400lm	AC220-240V	185x60x196mm
FL-BL2S50A1-B6	50W	4000lm	AC220-240V	211x60x226mm